




Constant pressure regulator 200

- mechanical central shut off
- integrated suck back system
- pressure regulator for a constant spraying pressure
- integrated safety valve
- pressure gauge connection with G $\frac{1}{4}$ - thread
- compatible with the altek modular system

Maximum pressure:	10 bar
Maximum flow rate:	200 l/min
Inlet- ϕ :	AS30
Return flow- ϕ :	25 mm hose connection
Outlet- ϕ :	36 mm, tuned to fit the altek modular system
Material:	POM GF 25 stainless steel 1.4305 anodised cast aluminium FPM and NBR seals

Options:

- 20 bar regulator available on request

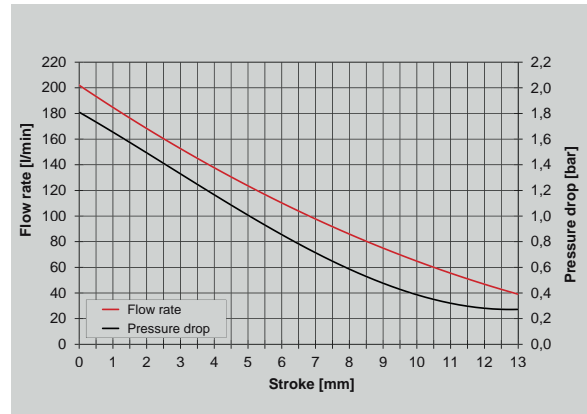

Regulator variant

Article-No.	Type	Article-No.
34736	Constant pressure regulator 200	

More Regulator assemblies are available upon request

A mm	B mm	C mm	D mm	E mm
220	120	135	64	42

Recommended valves	
Article-No.	Type
01400	Mechanical shut off valve 24/AS20
14578	Mechanical shut off valve 36/AS24
39767	Mechanical shut off valve 36/ ϕ 25mm
34622	Mechanical double valve 36/AS20
21920	Mechanical constant pressure valve 36/AS20
Recommended fittings inlet	
08337	Plug-in hose tail AS30/ ϕ 25/90° cpl
33793	Plug-in hose tail AS30/ ϕ 33/90° cpl
81119	Plug-in hose tail AS30/ ϕ 25 cpl
01399	Plug-in hose tail AS30/ ϕ 33 cpl
More Fittings: see section AS30 Fittings	

