



Regulators · Electrical proportional regulator 400

Electrical proportional regulator 400

- compact and flexible construction
- high flow rate
- flexible control response time
- modular unit
- quick and flexible assembly through Quick-Fit System
- comfortable manual emergency operation of for regulator and 3-way valves

Maximum pressure:	15 bar
Maximum flow rate:	450 l/min
Inlet- ϕ :	AS40
Return flow- ϕ :	ϕ 39 hose connection
Outlet- ϕ :	AS40
Nominal voltage:	12 Volt
Material:	POM GF 25 stainless steel 1.4305 FPM und NBR seals


Recommended fittings inlet

Article-No.	Type
08354	Female hose tail AS40/ ϕ 20
80357	Female hose tail AS40/ ϕ 25
34232	Female hose tail AS40/ ϕ 33
34231	Female hose tail AS40/ ϕ 39

Other fittings are available upon request

Recommended fittings return flow

09184	Plug-in hose tail AS40/ ϕ 25/90° cpl
08874	Plug-in hose tail AS40/ ϕ 33/90° cpl
08275	Plug-in hose tail AS40/ ϕ 39/90° cpl
04595	Plug-in hose tail AS40/ ϕ 25 cpl
04581	Plug-in hose tail AS40/ ϕ 33 cpl
06247	Plug-in hose tail AS40/ ϕ 39 cpl
17409	Plug-in hose tail AS40/ ϕ 46 cpl

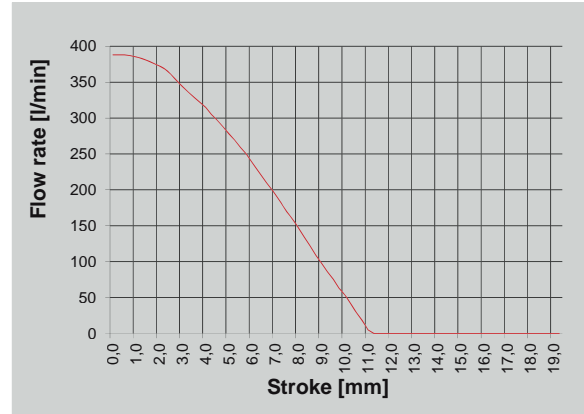

Regulator variant

Article-No.	Type	Electrical connection
81745	Electrical proportional regulator 400 approx 17 s	Cube plug DIN 175301
82200	Electrical proportional regulator 400 approx 12 s	Cube plug DIN 175301

A mm	B mm	C mm	AS1	AS2	D mm
180	105	300	40	40	39

