



System includes:

- \* Controller
- \* Interface Box
- \* Two sonar sensors
- \* Two sensor mounts with generic mounting hardware
- \* Sufficient wiring to suit most pull-type and self-propelled sprayers with boom widths up to 150 feet
- \* Installation and operators manual

Installation not included



altek International Ltd  
01652 688889  
info@altekinternational.com  
www.altekinternational.com

**RITEHEIGHT**  
*Automated Sprayer Boom Height Control*  
*new! Generation 4*



*"We upgraded to RiteHeight generation 4.*

*We really like the low profile sensor mounts. Being able to choose the most optimum operating mode for spraying ground, partial canopy and full canopy is amazing.*

*We are impressed with the performance of Greentronics' newest RiteHeight system!"*

*– Geoffrey Strang, Exeter, ON*



*RiteHeight on a Bestway Fieldpro sprayer with 90ft boom.*



*Compact sensor brackets allow for a variety of mounting options.*

## Choose from Three Operating Modes



### Ground Mode

Choose ground mode for optimum performance spraying bare ground or early emerging crops.



### Partial Canopy Mode

Choose Partial Canopy Mode for optimum performance in conditions where the crop produces an uneven target for the sensors. This mode will keep the boom level to the ground and not the uneven crop canopy.



### Full Canopy Mode

Choose Full Canopy Mode for the best spray in conditions where the ground is not visible through the crop's canopy.



**"Simple, Affordable, Farmer Friendly."**  
 – Stan Peutert, Assiniboia, SK; Top Air sprayer, 120 ft

RiteHeight on a Top Air sprayer.




RiteHeight on a Spra Coupe 7660.



RiteHeight on a Hardi Commander 10000



RiteHeight on a GVM Mako

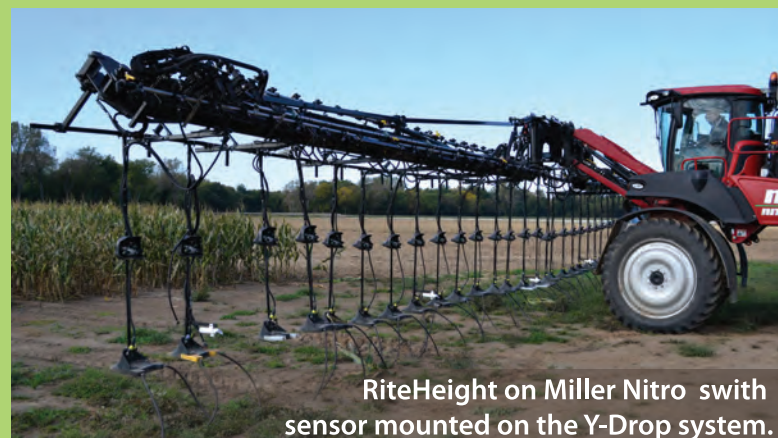

RiteHeight on Miller Nitro with sensor mounted on the Y-Drop system.



RiteHeight on a Y-Drop sprayer set up.

*"I installed the 2-sensor RiteHeight system six seasons ago. No service or repairs needed since. Still works like new. I'm really pleased with it. Great value package!"*

– John Vanderlinde, Glencoe, ON; Rogator 664 with 120ft booms



Standard Controller with sealed keypad and bright display to navigate the menu system for configuration and calibration.

## Features

### Choose from Three Operating Modes

- Bare Ground
- Partial Canopy
- Full Canopy

For optimum performance and stable operation

### Smart self-calibration

Automatically adjusts to the sprayers hydraulic performance.

### Ability to control proportional (PWM) valves.

### Long Range sensors

Choose from 2-5 sensor systems.

### ONE system fits ALL Sprayers

with electric-over-hydraulic controls

### Few components

Works with existing valves—**DIY install!**

**Modified versions available** for header height control and other applications.

**Now with ISOBUS compatible option!**



For further details please contact  
 01652 688889  
 or email  
[info@altekinternational.com](mailto:info@altekinternational.com)