






Ball valves · 3-way $\varnothing 39$ mm

3-way ball valve $\varnothing 39$ mm bottom feed

- innovative sealing concept with modified Polyamid for increased service life
- manual operation with low effort
- compact with large 39 mm nominal width

Operating time pressure:	max. 15 bar
Flow rate:	max. 500 l/min
Outlet- \varnothing :	AS50
Ball valve:	Stahl: 1.4305
Seals:	modifiziertes Polyamid
Material:	POM GF 25

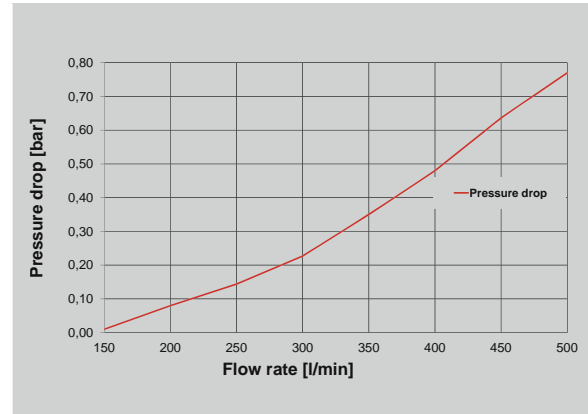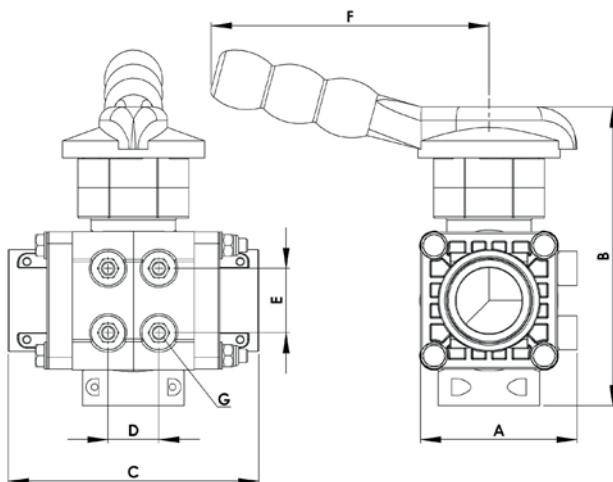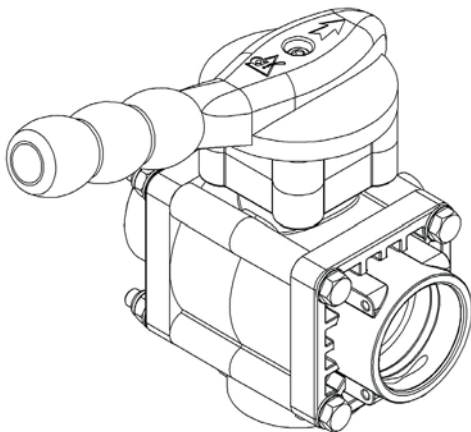

Article-No.	Type
83174	Ball valve 3-way, manually $\varnothing 39$ mm
Recommended fittings	
17157	Plug-in hose tail AS50/ $\varnothing 46$ cpl
17330	Plug-in hose tail AS50/ $\varnothing 46/90^\circ$ cpl
22040	Plug-in hose tail AS50/ $\varnothing 39$ cpl
24891	Plug-in hose tail AS50/ $\varnothing 39/90^\circ$ cpl
80610	Plug-in hose tail AS50/G2/male cpl
82945	Plug-in hose tail AS50/AS40 cpl
More Fittings: see section Fittings AS50	

A	B	C	D	E	F	G
93	176	148	30	38	164	4 x M8
Specified in mm						

