



Ball valves · 5-way 1¼"

5-way ball valve 1¼"



- individual adjustable seal
- high wear resistance
- retrofitable with electric drive
- **Optional: Special connectors are available**

Operating time pressure: max. 15 bar
 Flow rate: max. 300 l/min
 Inlet- ϕ : 1x AS40
 Outlet- ϕ : 4x AS40
 Ball valve: POM+PTFE
 Material: POM GF 25, PA, FPM and NBR seals

Options:

- Adapter for special connectors
- configurations of several ball valves are available upon request

A	B	C	D
180	140	140	215
Specified in mm			

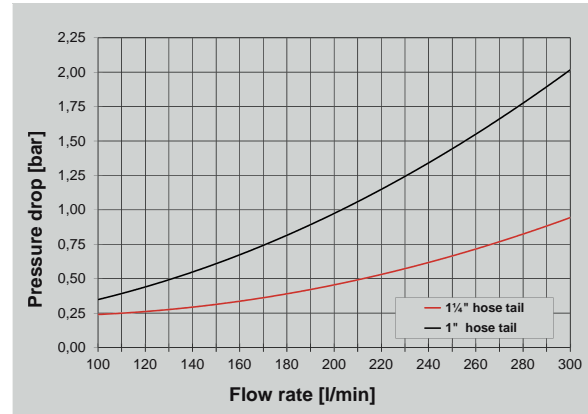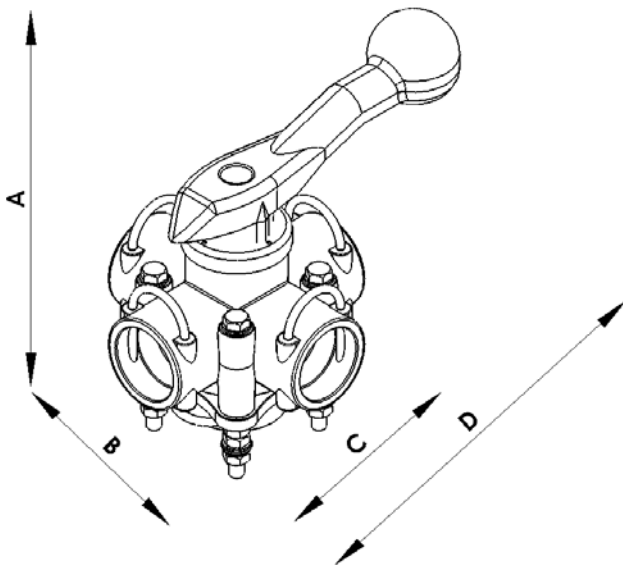

Article-No.	Type
61128	Kugelventil 5-Wege 1¼"
Recommended fittings	
80352	Plug-in hose tail AS40/ ϕ 20/90° cpl
09184	Plug-in hose tail AS40/ ϕ 25/90° cpl
08874	Plug-in hose tail AS40/ ϕ 33/90° cpl
08275	Plug-in hose tail AS40/ ϕ 39/90° cpl
80353	Plug-in hose tail AS40/ ϕ 20 cpl
04595	Plug-in hose tail AS40/ ϕ 25 cpl
04581	Plug-in hose tail AS40/ ϕ 33 cpl
06247	Plug-in hose tail AS40/ ϕ 39 cpl
80333	Blindstopfen AS40 cpl
82614	Adapter Plug-in hose tail AS40/ Banjo 2" cpl
More Fittings: see section Fittings AS40	

