




Ball valves · 5-way 3"

5-way ball valve 3"

- high wear resistance
- retrofitable with electric drive
- ball bearing shaft
- optional: special connectors are available
- standard fittings with BSP-thread
- Body made from liquid fertilizer proof anodised aluminium

Operating time pressure:	max. 3 bar
Flow rate:	max. 1.000 l/min
Inlet- ϕ :	3"
Outlet- ϕ :	3"
Ball valve:	POM+PTFE
Material:	POM GF 25, PA, Aluminium, FPM and NBR seals

A	B	C	D	E	F	AS1-AS5	G
263	263	270	250	93	158	G3 male	M10
Specified in mm							

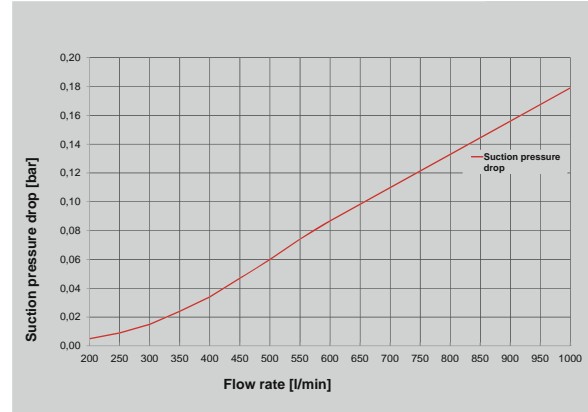

Article-No.	Type
82014	Manually 5-way ball valve 3"
82797	Manually 5-way ball valve 3" with POM ball and Banjo flange
82011	Flange BV 3" cpl G3/male
82542	Flange BV 3" cpl G2/male

Recommended fittingsEinlass (AS1-AS5)

All fittings of the series of standard BSP fittings can be used

More Fittings: see section AS Fittings

