




Regulators · Manually proportional regulator 300

Manual proportional regulator 300

- compact and flexible construction
- high flow rate
- self-contained working
- compatible when used with
- piston free of play

Maximum pressure:	15 bar
Maximum flow rate:	300 l/min
Inlet- ϕ :	AS40
Return flow- ϕ :	$\phi 39$ - hose connection
Outlet- ϕ :	AS40
Nominal voltage:	12 Volt
Material:	POM GF 25 stainless steel 1.4305 FPM und NBR seals

A mm	B mm	AS1	AS2	D mm
180	105	40	40	39

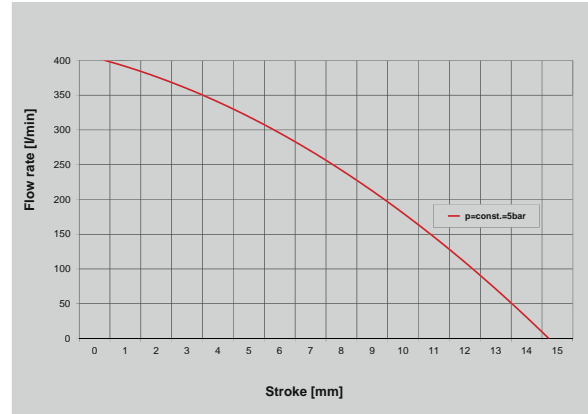

Regulator variant

Article-No.	Type
81873	Manual proportional regulator 300, with Cross piece
82199	Manual proportional regulator 300, with T-pieces

Recommended fittings inlet

Article-No.	Type
08354	Female hose tail AS40/ $\phi 20$
80357	Female hose tail AS40/ $\phi 25$
34232	Female hose tail AS40/ $\phi 33$
34231	Female hose tail AS40/ $\phi 39$

More Fittings: see section AS40 Fittings

Recommended fittings return flow

09184	Plug-in hose tail AS40/ $\phi 25/90^\circ$ cpl
08874	Plug-in hose tail AS40/ $\phi 33/90^\circ$ cpl
08275	Plug-in hose tail AS40/ $\phi 39/90^\circ$ cpl
04595	Plug-in hose tail AS40/ $\phi 25$ cpl
04581	Plug-in hose tail AS40/ $\phi 33$ cpl
06247	Plug-in hose tail AS40/ $\phi 39$ cpl
17409	Plug-in hose tail AS40/ $\phi 46$ cpl