



Proportional regulator 200

- mechanical central shut off
- integrated suck back system
- cross-sectional control for a constant output quantity even in case of speed fluctuations
- integrated safety valve
- pressure gauge connection with G $\frac{1}{4}$ - thread
- compatible with the altek modular system

Maximum pressure:	10 bar
Maximum flow rate:	200 l/min
Inlet- ϕ :	AS30
Return flow- ϕ :	25 mm hose connection
Outlet- ϕ :	36 mm, tuned to fit the altek modular system
Material:	POM GF 25 stainless steel 1.4305 anodised cast aluminium FPM and NBR seals

Recommended valves


Article-No.	Type
01400	Mechanical shut off valve 24/AS20
14578	Mechanical shut off valve 36/AS24
39767	Mechanical shut off valve 36/ ϕ 25mm
34622	Mechanical double valve 36/AS20
21920	Mechanical constant pressure valve 36/AS20
47942	Electrical shut off valve 36/AS24

Recommended fittings inlet

08337	Plug-in hose tail AS30/ ϕ 25/90° cpl
33793	Plug-in hose tail AS30/ ϕ 33/90° cpl
81119	Plug-in hose tail AS30/ ϕ 25 cpl
01399	Plug-in hose tail AS30/ ϕ 33 cpl

More Fittings: see section AS30 Fittings

A mm	B mm	C mm	D mm	E mm
225	120	130	64	42

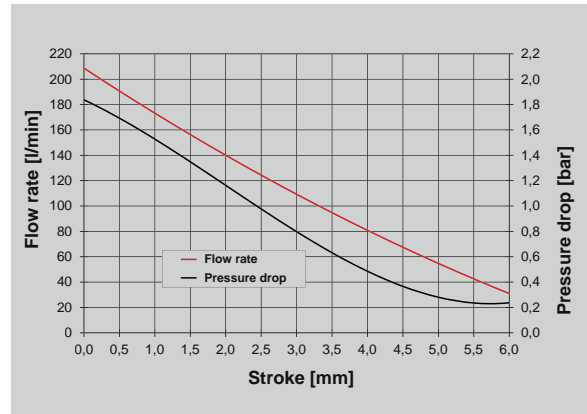

Regulator variant

Article-No.	Type	Article-No.
31479	1 Proportional regulator 200 1 Pressure filter with drain valve 3 Mechanical constant pressure valve 36/AS20	32772 34606 21920
82615	1 Proportional regulator 200 1 Pressure filter with drain tap G 2 Electrical shut off valve 36/AS24	32772 34606 47942
82616	1 Proportional regulator 200 1 Pressure filter with drain tap G 4 Electrical shut off valve 36/AS24	32772 34606 47942

More Regulator assemblies are available upon request

